

SMART GARAGE DOOR  
CONTROL AT THE PUSH  
OF A BUTTON

# Module for Hörmann drives

HmIP-MOD-HO


The module for Hörmann drives offers integration of garage door or entrance gate control into the Homematic IP smart home: door drives can be conveniently controlled via smartphone app and via a Homematic IP Remote Control.



homematic <sup>IP</sup>  
Smart Living, Simply Exciting.



Easy click-in installation without any tools

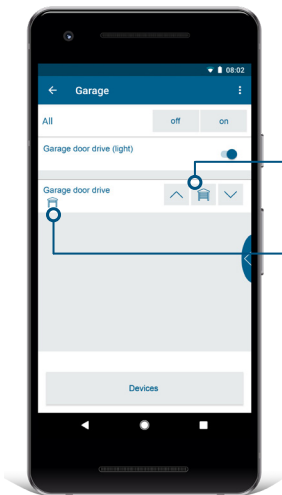

Comfortable garage door control:  
Opening, closing and ventilation position

Status display:  
Open, closed, moving

## SMART CONTROL OF GARAGE AND ENTRANCE GATES

In combination with the module, garage and entrance doors can be comfortably controlled via the Homematic IP app. Control is also possible via various Homematic IP remote controls and push-buttons. Time profiles in the app offer automatic opening and closing\*, e.g. of entrance doors.

## FLEXIBLE USE FOR A LARGE NUMBER OF HÖRMANN MODULES

Compatible with the following drives:

- ✓ SupraMatic series 3 E/P from Index Ci
- ✓ SupraMatic HT3
- ✓ RotaMatic/P/PL series 1 (from 09/2010) and series 2
- ✓ LineaMatic/P/H series 1 (from 10/2009) and series 2
- ✓ VersaMatic/P
- ✓ WA300 S4
- ✓ WA300 R S4

Hörmann HAP1 HCP Adapter to HmIP-MOD-HO additionally required, ordering no. 170046:

- ✓ Liftronic 700-2/800-2
- ✓ RollMatic 2
- ✓ SupraMatic/ProMatic series 4



## MONITORING OF GARAGE DOORS

The status of the garage door (moving, open, closed, partial opening e.g. for ventilation) can be checked at any time via the Homematic IP app.

## EASY INSTALLATION WITHOUT ANY TOOLS

Custom-fit design for concealed installation into compatible Hörmann drives. The connecting cable with plug connectors allows for quick connection to the drive without tools. Additional power supply is not required, as power is supplied by the Hörmann drive.

\* An additional light barrier is required if the door is not in sight during operation.

## LOGISTICAL DATA

|                        |                   |
|------------------------|-------------------|
| Product reference      | 153986A0          |
| EAN code               | 4047976539864     |
| Short description      | HmIP-MOD-HO       |
| Packing unit           | 90                |
| Packing dimensions     | 122 x 112 x 48 mm |
| Weight incl. packaging | 116.2 g           |

## PACKAGE CONTENTS

Homematic IP Module for Hörmann drives  
Connecting cable  
User manual and QR code sticker

To enable operation, the device has to be connected with one of the following solutions:

- Homematic IP Access Point with free smartphone app and free cloud service
- Third-party solutions of partners

## TECHNICAL SPECIFICATIONS

|                         |                                     |
|-------------------------|-------------------------------------|
| Supply voltage          | supplied by Hörmann drive           |
| Ambient temperature     | -20 to +60 °C                       |
| Dimensions (W x H x D)  | 48 x 52 x 16 mm                     |
| Weight                  | 26 g                                |
| Radio frequency band    | 868.0-868.6 MHz<br>869.4-869.65 MHz |
| Typ. open area RF range | 250 m                               |